


Standard Concrete Masonry Units


Metric Light Weight Units

Imperial Light Weight Units

	Metric Light Weight Units						Imperial Light Weight Units		
	100 mm	150 mm	200 mm	250 mm	300 mm		8 Inch	10 Inch	
Standard & Corner (mixed on pallet)	100 mm Standard & Single Score Standard w Breaker 90D 190 H 390 W	150 mm Standard & Single Score Standard w Breaker 140 D 190 H 390 W	200 mm Standard & Single Score Corner No Sash w Breaker 190 D 190 H 390 W	250 mm Standard & Single Score Corner No Sash w Breaker 240 D 190 H 390 W	250 mm SKB Block & Corner No Sash w Breaker 240 D 190 H 390 W	300 mm Standard & Corner No Sash 290 D 190 H 390 W	8 Inch Standard & Corner No Sash 7 5/8 D 7 5/8 H 15 5/8 W	10 Inch Standard & Corner No Sash 9 5/8 D 7 5/8 H 15 5/8 W	
Half High	100 mm Half High 90 D 90 H 390 W	150 mm Half High 140 D 90 H 390 W	200 mm Half High 190 D 90 H 390 W						
Half		150 mm Half No Sash 140 D 190 H 190 W	200 mm Multi-Purpose Half 190 D 190 H 190 W	250 mm Half No Sash 240 D 190 H 190 W		300 mm Half No Sash 290 D 190 H 190 W	8 Inch Half w Sash 7 5/8 D 7 5/8 H 7 5/8 W	10 Inch Half No Sash 9 5/8 D 7 5/8 H 7 5/8 W	
L-Corner	100 mm L-Corner 90/190 D 190 H 390 W								
KO Lintel		150 mm Knock Out Lintel 140 D 190 H 390 W	200 mm Knock Out Lintel 190 D 190 H 390 W	250 mm Knock Out Lintel 240 D 190 H 390 W	250 mm SKB Knock Out Lintel 240 D 190 H 390 W	300 mm Knock Out Lintel 290 D 190 H 390 W	300 mm SKB Block Knock Out Lintel 290 D 190 H 390 W	8 Inch Knock Out Lintel 7 5/8 D 7 5/8 H 15 5/8 W	10 Inch Knock Out Lintel 9 5/8 D 7 5/8 H 15 5/8 W
Single Core Lintel			200 mm Single Core Lintel 190 D 190 H 390 W	200 mm Multi Purpose Block 190 D 190 H 390 W	250 mm Single Core Lintel 240 D 190 H 390 W		8 Inch Single Core Lintel 7 5/8 D 7 5/8 H 15 5/8 W		
Single Bullnose		150 mm Single Bullnose w Breaker 140 D 190 H 390 W	200 mm Single Bullnose w Breaker 190 D 190 H 390 W	200 mm Single Bullnose Half 190 D 190 H 390 W	250 mm Single Bullnose w Breaker 240 D 190 H 390 W	50 mm Slab 40 D 190 H 390 W			
Double Bullnose		150 mm Double Bullnose w Breaker 140 D 190 H 390 W	200 mm Double Bullnose w Breaker 190 D 190 H 390 W	200 mm Single Bullnose Half 190 D 190 H 390 W	250 mm Double Bullnose w Breaker 240 D 190 H 390 W	Square Pilaster 400 mm Square 390 D 190 H 390 W			

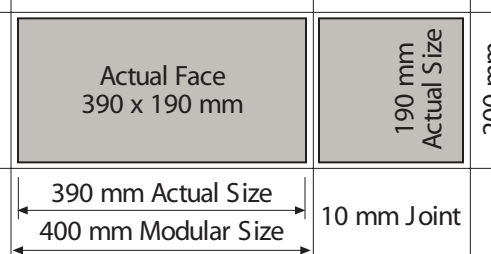

The strength of the masonry unit is measured over the net area of the unit. Stock units are manufactured using L₂30s concrete.



The Beauty of DURABILITY™